


DIN 603, Cup head screw with nut, M 20x180, 4.6/4.8, zinc-plated, standard, 5 µm, Zn5/An/T0



Article number	Weight in kg
21060320180	0.582
Customs number	Material
73181595	Steel
Quality	Coating
4.6/4.8	zinc-plated, standard, 5 µm, Zn5/An/T0
Diameter	Length
20 mm	180 mm

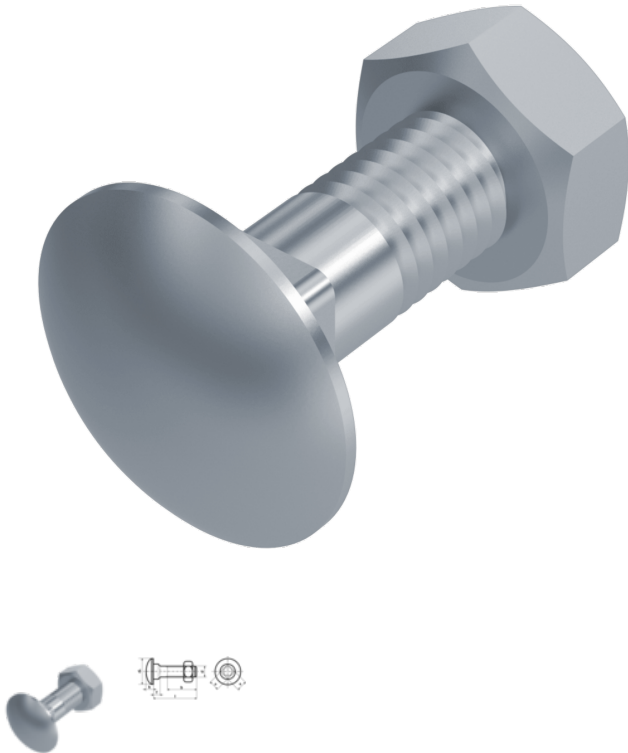

Product details

Cup head square neck bolt with nut

Material	Steel
Total lenght l	180 mm
Length	180 mm
Norm	DIN 603
Diameter	20 mm
Height of the head k	11.05 mm
Square height f	15.9 mm
Coating	zinc-plated, standard, 5 µm, Zn5/An/T0
Diameter of the head dk	46.8 mm
Thread length b	52 mm

Force application type	Square neck
Square wide v	20.84 mm
Quality	4.6/4.8
Force application	VK 20,84
Diameter d	20 mm

Remarks

Thread end conical dome (CH) or lens dome (RN) according to DIN EN ISO 4753 at the manufacturer’s choice.

Product variants

Diameter (mm)	5	6	8	10	12	16	20
Length (mm)							
16	.	.	.	.			
20	.	.	.	.			
25	.	.	.	.			
30	.	.	.	.	.		
35	.	.	.	.	.	.	
40	.	.	.	.	.	.	
45	.	.	.	.	.	.	
50	.	.	.	.	.	.	
55	.	.	.	.	.	.	
60	.	.	.	.	.	.	
65	.	.	.	.	.	.	
70	.	.	.	.	.	.	
75		.	.	.	.	.	
80	.	.	.	.	.	.	.
85				.	.		
90	.	.	.	.	.	.	
100		.	.	.	.	.	.
110		.	.	.	.	.	
120		.	.	.	.	.	.
130		.	.	.	.	.	
140		.	.	.	.	.	.
150		.	.	.	.	.	
160			.	.	.	.	
170			.	.	.	.	
180			.	.	.	.	.
190			.	.	.	.	
200			.	.	.	.	.
220				.	.	.	.
240				.	.	.	.
250					.		
260				.	.	.	.
280				.	.	.	.
300				.	.	.	.
320				.	.	.	.
340					.	.	

Diameter (mm)	5	6	8	10	12	16	20
Length (mm)							
360					.	.	
380					.	.	.
400					.	.	
540						.	