


DIN 933, hexagon head bolt, M 18x80, 8.8, zinc-plated, standard, 5 µm, Zn5/An/T0



|                   |                                        |
|-------------------|----------------------------------------|
| Article number    | Weight in kg                           |
| 2409331880        | 0.186                                  |
| Customs number    | Material                               |
| 73181588          | Steel                                  |
| Quality           | Coating                                |
| 8.8               | zinc-plated, standard, 5 µm, Zn5/An/T0 |
| Diameter          | Length                                 |
| 18 mm             | 80 mm                                  |
| Force application | Norm                                   |
| SW 27             | ISO 4017 / DIN 933                     |

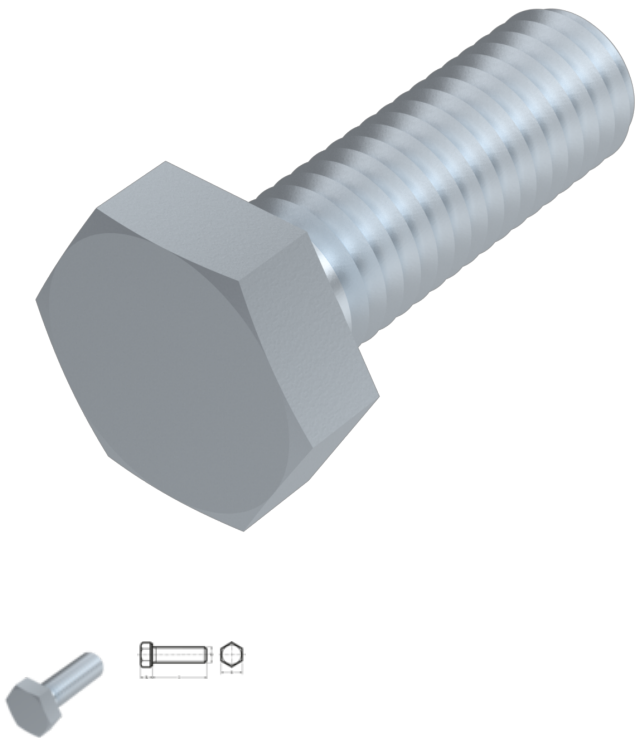

Product details

Threaded close up to the head.

|                        |                    |
|------------------------|--------------------|
| Material               | Steel              |
| Force application type | External hex       |
| Length                 | 80 mm              |
| Norm                   | ISO 4017 / DIN 933 |
| Total lenght l         | 80 mm              |
| Norm                   | ISO 4017           |
| Diameter               | 18 mm              |
| Quality                | 8.8                |
| Height of the head k   | 11.5 mm            |
| Force application      | SW 27              |

|            |                                        |
|------------|----------------------------------------|
| Coating    | zinc-plated, standard, 5 µm, Zn5/An/T0 |
| Diameter d | 18 mm                                  |

Remarks

Standard was withdrawn. DIN similar to ISO 4017. Changed SW for ISO.Sizes M 10, M 12, M 14 and M 22 only available in DIN 933. For further sizes see ISO 4017.

Application

Universell einsetzbar, vor allem im Maschinenbereich

Product variants

| Force application  | SW 27 |
|--------------------|-------|
| Norm               |       |
| ISO 4017 / DIN 933 | .     |