



DIN 933, hexagon head bolt, M 3x8, 8.8, zinc-plated,  
standard, 5 µm, Zn5/An/T0

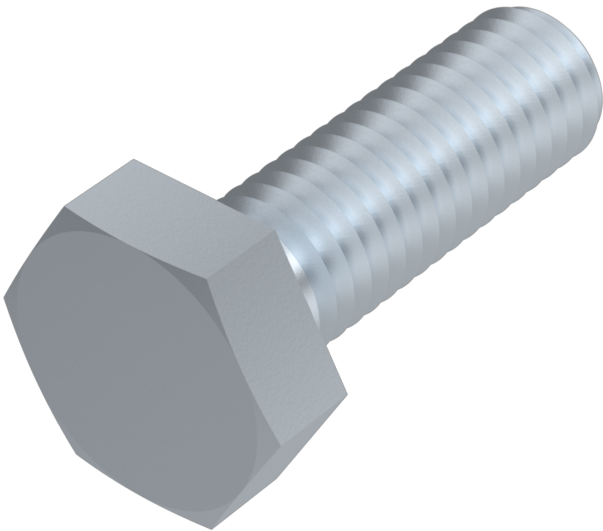

|                                    |                                                          |
|------------------------------------|----------------------------------------------------------|
| <b>Article number</b><br>24093338  | <b>Weight in kg</b><br>0.001                             |
| <b>Customs number</b><br>73181588  | <b>Material</b><br>Steel                                 |
| <b>Quality</b><br>8.8              | <b>Coating</b><br>zinc-plated, standard, 5 µm, Zn5/An/T0 |
| <b>Diameter</b><br>3 mm            | <b>Length</b><br>8 mm                                    |
| <b>Force application</b><br>SW 5,5 | <b>Norm</b><br>ISO 4017 / DIN 933                        |



Product details

Threaded close up to the head.

|                        |                    |
|------------------------|--------------------|
| Material               | Steel              |
| Force application type | External hex       |
| Length                 | 8 mm               |
| Norm                   | ISO 4017 / DIN 933 |
| Total lenght l         | 8 mm               |
| Norm                   | ISO 4017           |
| Diameter               | 3 mm               |
| Quality                | 8.8                |
| Height of the head k   | 2 mm               |
| Force application      | SW 5,5             |

|            |                                        |
|------------|----------------------------------------|
| Coating    | zinc-plated, standard, 5 µm, Zn5/An/T0 |
| Diameter d | 3 mm                                   |

Remarks

Standard was withdrawn. DIN similar to ISO 4017. Changed SW for ISO.Sizes M 10, M 12, M 14 and M 22 only available in DIN 933. For further sizes see ISO 4017.

Application

Universell einsetzbar, vor allem im Maschinenbereich

Product variants

|                    |        |
|--------------------|--------|
| Force application  | SW 5,5 |
| Norm               |        |
| ISO 4017 / DIN 933 | .      |