

DIN 985, hexagonal nut, M 8, 10, zinc-plated, standard, 5 µm, Zn5/An/T0



Article number
2509858

Customs number
73181660



Quality
10

Diameter
8 mm

Weight in kg
0.005

Material
Steel

Coating
zinc-plated, standard, 5 µm, Zn5/An/T0

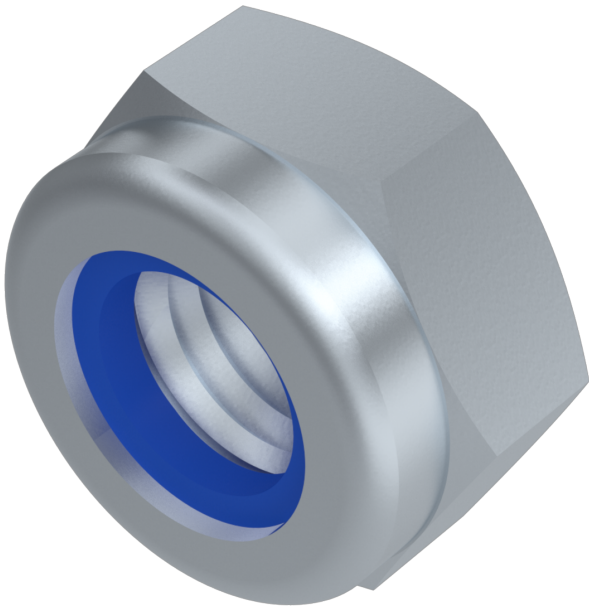

Product details

With polyamide locking insert, low profile form.

Material	Steel
Force application type	External hex
Height h1	5.5 mm
Height h	8 mm
Minimum height for recess km	4.4 mm
Norm	DIN 985
Diameter	8 mm
Quality	10
Force application	SW 13
Coating	zinc-plated, standard, 5 µm, Zn5/An/T0

Diameter d8 mm

Benefits

klemmende Wirkung des Polyamid-Einsatzes ermöglicht verlässliche Sicherung

Remarks

Standard was withdrawn. DIN corresponds to ISO 10511. Changed SW and height for ISO. Item is delivered according to DIN. Attention: Possibility of hydrogen embrittlement acc. ISO 4042. For further questions, please contact us under: engineering@keller-kalmbach.com

Product variants

Coating	pln	zinc-plated, standard, 5 µm, Zn5/An/T0
Diameter (mm)		
4		•
5		•
6		•
8		•
10		•
12	•	•
14		•
16	•	•
18		•
20		•
22		•
24		•
30		•